



PLUS SHINGLES • APP modified bitumen (TÜM approved)



>>> Victorian® PLUS (01) Black






PLUS SHINGLES • APP modified bitumen (TÜM approved)

Your Benefits:

- APP modified bitumen (TÜM approved)
- Superior quality high grade bitumen fibreglass shingle
- Exceeds the most stringent worldwide standards
- Additional UV protection thanks to APP Bitumen
- Higher flexibility with low(er) temperatures

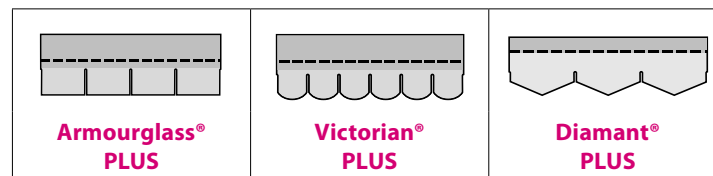

| | | | |
|-----------------------------|--------------------------|--------------------------|--------------------------|
| Length (EN 544) | 1000 mm (± 3) | 1000 mm (± 3) | 1000 mm (± 3) |
| Width (EN 544) | 336 mm (± 3) | 336 mm (± 3) | 284 mm (± 3) |
| Weight (slope > 25°) | ± 11,4 kg/m ² | ± 10,9 kg/m ² | ± 11,0 kg/m ² |
| Coverage/bundle | max. 2 m ² | max. 2 m ² | max. 2 m ² |
| Shingles/bundle | 21 | 21 | 27 |
| Bundles/pallet | 66 | 66 | 60 |

| | | | |
|---|-------------|-------------|-------------|
| Granule adhesion (EN 12039) | max. 1,2 g | max. 1,2 g | max. 1,2 g |
| Tensile length* (EN 12311-1) | 900 N/50 mm | 900 N/50 mm | 900 N/50 mm |
| Tensile width* (EN 12311-1) | 500 N/50 mm | 500 N/50 mm | 500 N/50 mm |
| Elongation length* (EN 12311-1) | 3,00 % | 3,00 % | 3,50 % |
| Elongation width* (EN 12311-1) | 3,00 % | 3,00 % | 3,50 % |
| Nail tear resistance* (EN 12311-1) | 160 N | 160 N | 160 N |

| | | | |
|----------------------------------|----------------------------------|----------------------------------|----------------------------------|
| External fire performance | B _{roof} T ₁ | B _{roof} T ₁ | B _{roof} T ₁ |
| Reaction to fire | Class E | Class E | Class E |

* Registered average values



IKO Sales International NV
 I.Z. Ravenshout 3.974 • Truibroek 74 • 3945 Ham • Belgium
 T +32 (0)11 34 01 20 • F +32 (0)11 34 01 30
 E residential.europe@iko.com • www.iko.be

